


AU & NZ TEMPORARY FENCE

Temporary Fencing for Australia & New Zealand

Strongest & Most flexible temporary fencing with fence panels, fence feet and associated accessories are ideal solution to perimeter security, including construction sites, private sites and demolition sites.



AVAILABLE SPECIAL TYPES

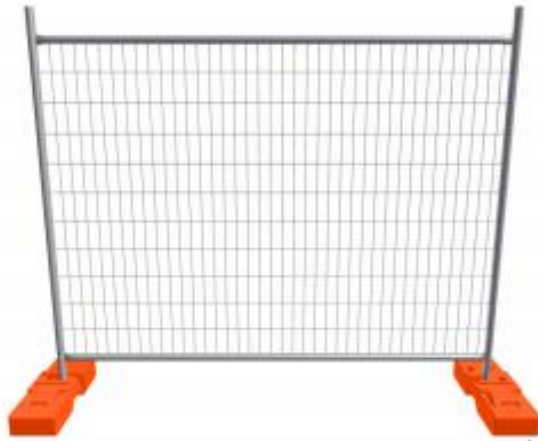

Econo Fence Panel

Panel Size: 2400 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 1.5 mm thickness.

Zinc Coating: 42 microns.


Infill Mesh: 3 mm horizontal, 3 mm vertical.

Aperture Spacing: 150 mm × 60 mm spacing.

Surface Treatment:

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.

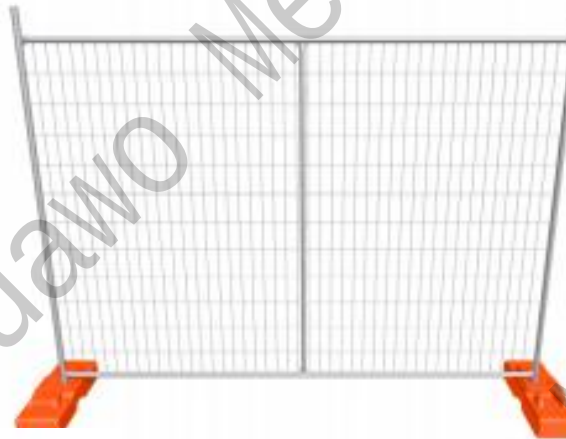

Heavy Duty Panel

Panel Size: 2650 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 2.0 mm thickness.

Infill Mesh: 4 mm horizontal, 4 mm vertical.


Aperture Spacing: 150 mm × 60 mm spacing.

Zinc Coating: 42 microns.

Surface Treatment:

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.

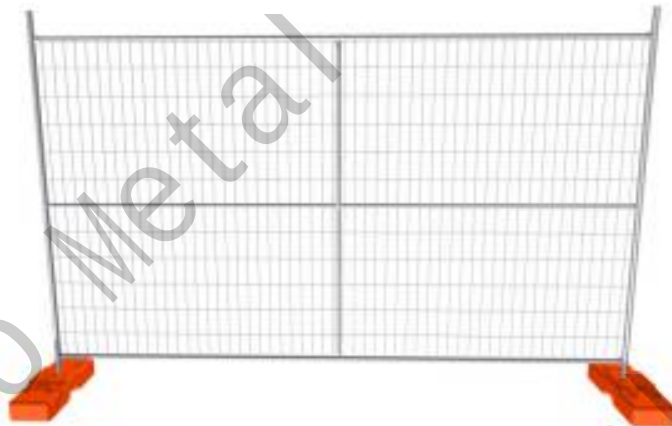

Custom Panel specification I – Extra large

Panel Size: 3300 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 2.0 mm thickness.

Infill Mesh: 4 mm horizontal, 4 mm vertical.

Aperture Spacing: 150 mm × 60 mm spacing.

Surface Treatment:

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.

ASSOCIATED ACCESSORIES



Plastic Feet

Clamps

Shade Cloth

Razor & Barbed Wire



Handrails

Fence gate

Dog Bars


Bracing

CANADA TEMPORARY FENCE

Canada Temporary Fence

Strongest & Welded temporary fencing with platy fence feet and shaped top clips, which is major and welcomed portable fencing in Canada and North America.

Modular fence panels with plug-in installation are designed for quick and efficient set up and take down.

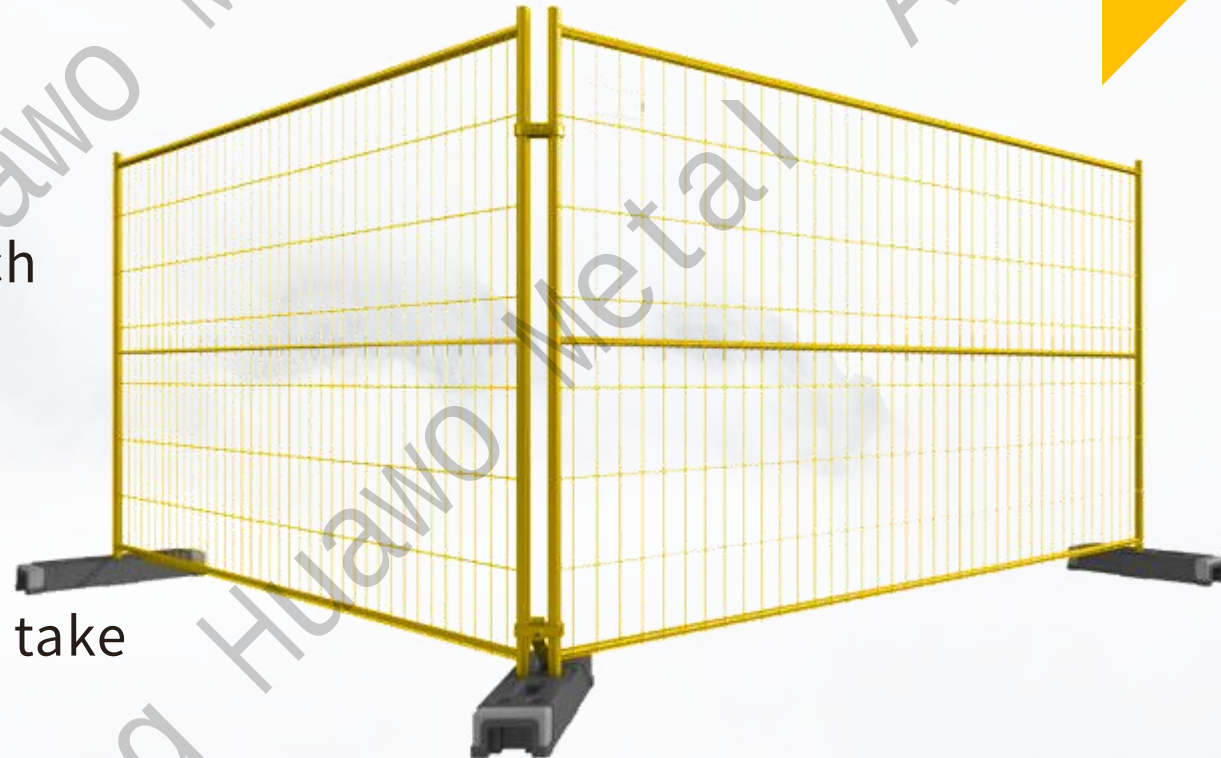

FEATURES & BENEFITS



Stable Structure

360° full welding by hand and hot dipped galvanized surface treatment make it durable and anti-corrosion.



Easy Installation

Light weight and pre-designed plug-in junction for quick access anywhere on site.



Transparent Vision


Various size of welded mesh opening are visible without any sight blocks.



Flexible Application

Removable panels with flexible isolation angle for any site needing security or privacy.

AVAILABLE SPECIAL TYPES

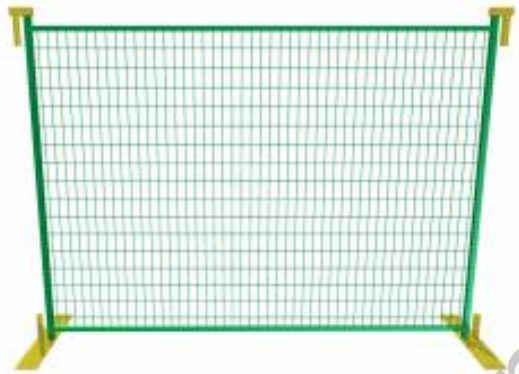

6' x 8' CA temp fencing

Dimensions (H x L): 6' x 8'.

Frame O.D.: 30 x 30, 40 x 40 mm optional.

Frame TH : 2.0-2.5 mm.

Middle horizontal pipe: 25 x 25 x 2 mm.


Wire diameter: 4.0, 6.0 mm optional.

Mesh opening: 50 x 100, 50 x 150, 75 x 150 mm optional.

Finish:

Electric galvanized before powder coated.

Hot dipped galvanized after welding.

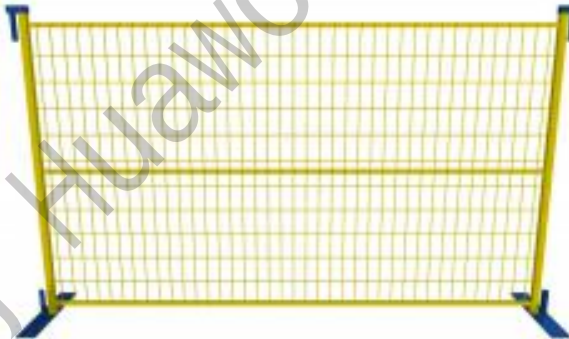

6' x 10' CA temp fencing

Dimensions (H x L): 6' x 10'.

Frame O.D.: 30 x 30, 40 x 40 mm optional.

Frame Thickness : 2.0-2.5 mm.

Middle horizontal pipe: 25 x 25 x 2 mm.


Wire diameter: 4.0, 6.0 mm optional.

Mesh opening: 50 x 100, 50 x 150, 75 x 150 mm optional.

Finish:

Electric galvanized before powder coated.

Hot dipped galvanized after welding.

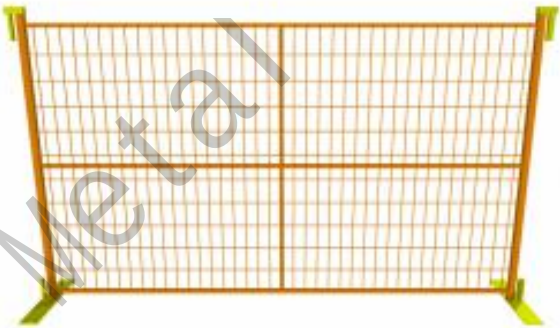

Alternative Specifications

Length : 8', 9.5', 10' optional.

Height : 6', 6.2', 8', 8.2' optional.

Frame O.D.: 30 x 30, 40 x 40 mm optional.

Frame Thickness : 2.0-2.5 mm.

Middle horizontal pipe: 25 x 25 x 2 mm.

Wire diameter: 4.0, 6.0 mm optional.

Mesh opening: 50 x 100, 50 x 150, 75 x 150 mm optional.

Finish:



Electric galvanized before powder coated.

Hot dipped galvanized after welding.

ASSOCIATED ACCESSORIES

Fence Feet

- Material: Steel plate, steel solid rod & steel pipe.
- Dimensions (H × W × TH): 600 × 110 × 8, 900 × 80 × 7 mm optional.
- Hole size O.D.: 19 mm.
- Interior round steel rod/pipe: 30 mm O.D. × 150 mm H.
- Exterior square steel rod/pipe: 30 × 30 × 150 mm.
- Rod space: 30 mm.

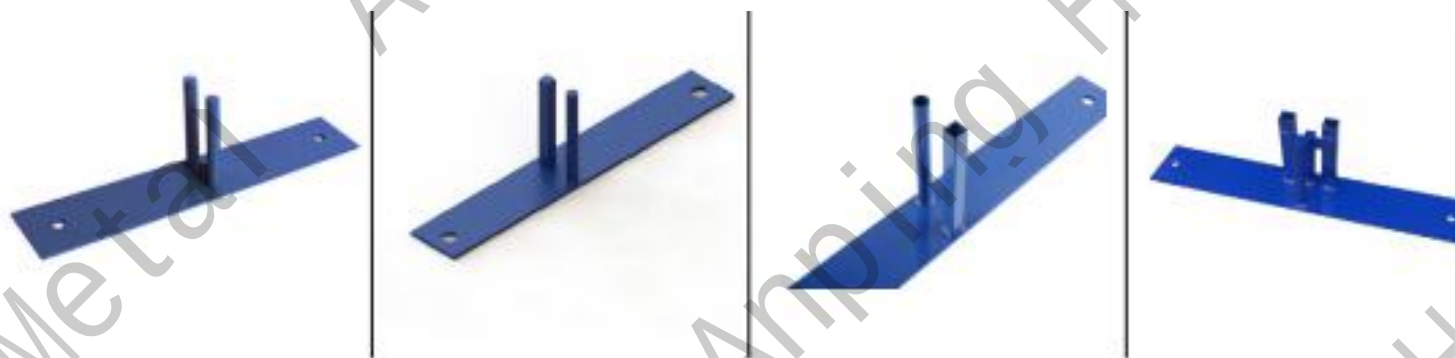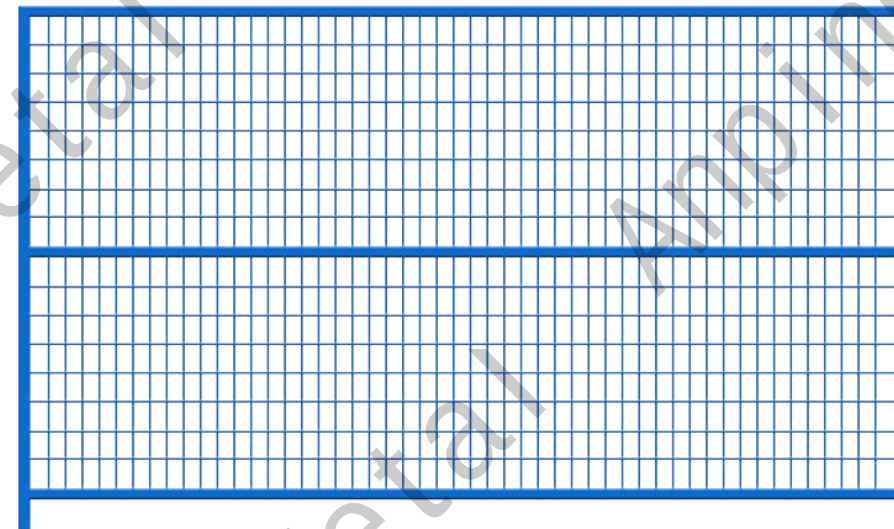

Double Round Steel Rod

Round & Rectangular
Steel Rod

Round & Rectangular
Steel Pipe

Corner feet

AVAILABLE COLORS

RAL 9010 (white), RAL 1021 (yellow),
 RAL 5005 (dark blue), RAL 5012 (light blue),
 RAL 6005 (dark green), RAL 9005 (black),
 RAL 7004 (light gray), RAL 7005 (dark gray),
 RAL 3001 (red)

RAL-1000	RAL-1001	RAL-1002	RAL-1003	RAL-1004	RAL-1005	RAL-1006	RAL-1007	RAL-1012	RAL-1013	RAL-1015	RAL-1024
RAL-1027	RAL-1028	RAL-1032	RAL-2000	RAL-2001	RAL-2002	RAL-2010	RAL-3001	RAL-3003	RAL-3005	RAL-3007	RAL-3011
RAL-3012	RAL-3013	RAL-3014	RAL-3015	RAL-3016	RAL-3018	RAL-3027	RAL-4001	RAL-4002	RAL-4005	RAL-4007	RAL-4008
RAL-5000	RAL-5002	RAL-5003	RAL-5004	RAL-5005	RAL-5007	RAL-5008	RAL-5009	RAL-5011	RAL-5012	RAL-5014	RAL-5020
RAL-6000	RAL-6001	RAL-6002	RAL-6003	RAL-6004	RAL-6007	RAL-6008	RAL-6009	RAL-6010	RAL-6011	RAL-6012	RAL-6013
RAL-6014	RAL-6015	RAL-6016	RAL-6017	RAL-6018	RAL-6019	RAL-6020	RAL-6021	RAL-6022	RAL-6025	RAL-6026	RAL-6029
RAL-7000	RAL-7001	RAL-7002	RAL-7003	RAL-7004	RAL-7005	RAL-7006	RAL-7008	RAL-7009	RAL-7011	RAL-7012	RAL-7013
RAL-7015	RAL-7016	RAL-7022	RAL-7023	RAL-7024	RAL-7026	RAL-7030	RAL-7031	RAL-7035	RAL-7037	RAL-7038	RAL-7039
RAL-8000	RAL-8001	RAL-8002	RAL-8003	RAL-8004	RAL-8007	RAL-8011	RAL-8014	RAL-8015	RAL-9001	RAL-9003	RAL-9010